



GRABO
1905

WALL COVERING

MURAVYL
SILVER KNIGHT WALL

MURAVYL

HIGH PERFORMANCE FLEXIBLE
WALL COVERING

PERFORMANCE, FEATURES & BENEFITS

- 2 m width
- Excellent fire resistance
- Dimensionally stable
- Anti-bacterial
- Antistatic


RECOMMENDED USAGE

- Education
- Healthcare
- Retail
- Hospitality
- Offices

DESCRIPTION		MURAVYL	
TOTAL THICKNESS 1.5 mm	Construction	heterogeneous wall covering	
	Total thickness	EN ISO 24346	1.5 mm
	Wear layer thickness	EN ISO 24340	0.65 mm
	Width of roll	EN ISO 24341	2 m
	Length of roll	EN ISO 24341	25 lm
TOTAL WEIGHT 1.4 kg/m²	Total weight	EN ISO 23997	1.4 kg/m²
	CLASSIFICATION		
	Product specification	EN ISO 11638	✓
WIDTH OF ROLL 2 m	Residual indentation	ISO 24343-1	max. 0.2 mm
	Dimensional stability	EN ISO 23999	max. 0.2 %
	Light fastness	ISO 105-B02	grade 6
FIRE RESISTANCE B-S2, d0	PERFORMANCE		
	Abrasion group	EN 660-2	T
	Fire resistance	EN 13501-1	class: B-s2, d0
GRABO SAN MINIMIZE THE GROWTH OF MICROORGANISMS	Chemical resistance	EN ISO 26987	✓
	Anti bacterial and fungicid treatment		graboSAN
	Seaming method		hot or cold welding

CONSTRUCTION

- Wear layer
- Glass fibre reinforcement
- Back layer

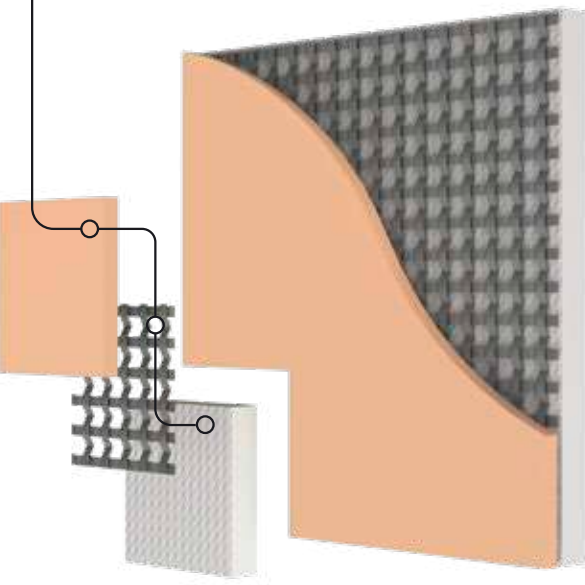

WALL COVERING



GRABO MURAVYL

SILVER KNIGHT WALL

SELF-DISINFECTIVE FLEXIBLE
WALL COVERING

PERFORMANCE, FEATURES & BENEFITS

- Eliminates harmful pathogens without chemicals
- Flexible
- Dimensionally stable
- 1.5 m width

RECOMMENDED USAGE

- Healthcare
- Education
- Retail
- Hospitality
- Offices

TOTAL THICKNESS
1.5 mm

TOTAL WEIGHT
1.5 kg/m²

WEAR LAYER
0.2 mm

WIDTH OF ROLL
1.5 m

GRABO **SAN** 
MINIMIZE THE GROWTH
OF MICROORGANISMS

DESCRIPTION

Construction	SILVER KNIGHT WALL	
Total thickness	EN ISO 24346	1.5 mm
Wear layer thickness	EN ISO 24340	0.2 mm
Width of roll	EN ISO 24341	1.5 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	1.5 kg/m²

CLASSIFICATION

Residual indentation	ISO 24343	max. 0.2 mm
Dimensional stability	EN ISO 23999	max. 0.2 %
Light fastness	ISO 105-B02	grade 6


PERFORMANCE

Abrasion group	EN 660-2	T
Chemical resistance	EN ISO 26987	✓
Surface treatment	TechSurface	
Anti bacterial and fungicid treatment	Silver Knight	
Seaming method	hot or cold welding	




CONSTRUCTION


- Silver Knight Tech surface wear layer
- Glass fibre reinforcement
- Back layer

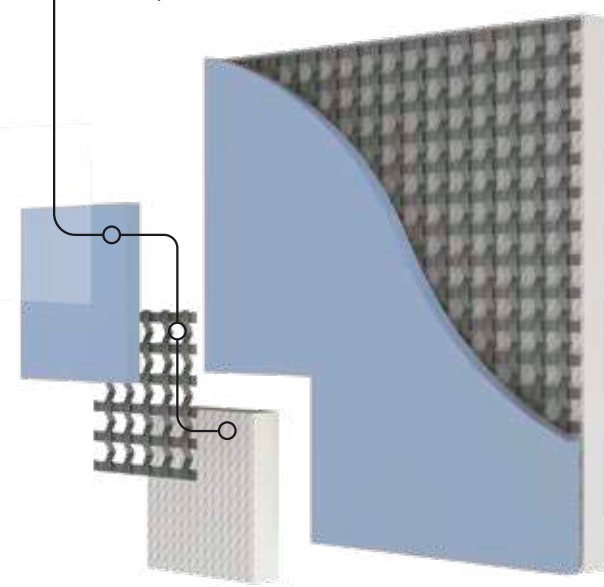


WALL COVERING




1001-275

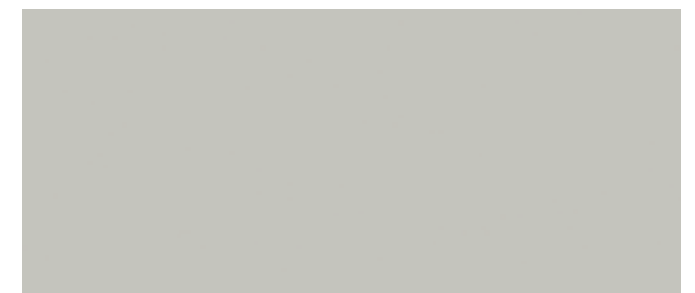

1217-275

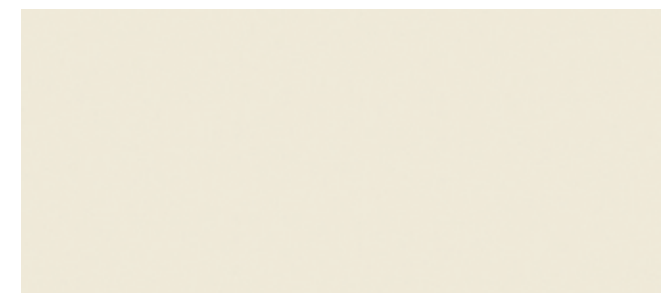

1137-275

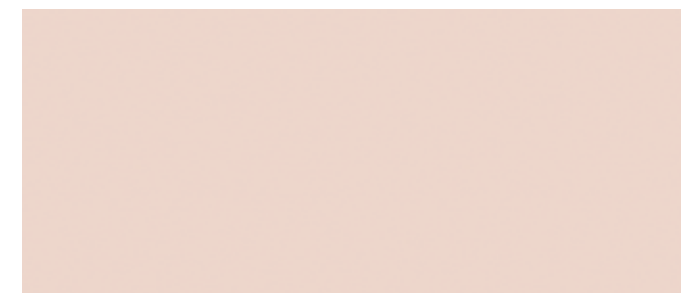

2258-275



7089-275



6030-275

GRABO SILVER KNIGHT WALL